



# Emergency Battery Backup

## Sump Pump System

### Basement Flood Protection

Operates automatically during power outage or if primary pump fails.

### Proprietary Smart Charging Technology

Recharges battery up to 5X faster and extends battery life.

### High Performance Pump

Removes up to 48% more gallons per charge than the leading competitor.

### Dual Battery Capacity

Provides extended run time.



**12V** 2040 GPH  
FPDC20


PERFORMANCE (GPH)						SOLIDS HANDLING
DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	12'	MAX. LIFT	
<b>FPDC20</b>	2040	1380	600	240	13'	3/16"

FEATURE	FLOTEC® FPDC20	COMPETITION	FLOTEC ADVANTAGE
Max Flow (12.7V)	2040 GPH	1680 GPH	21% more flow
Flow @ 10' (12.7V)	600 GPH	300 GPH	2X more flow
Max Head	13.3'	11.2'	20% higher head
Gallons per charge @ 10' head	2900	1951	48% more gallons per charge
Charger	2.0 AMPS	0.4 AMPS	5X faster charging

\*Performance data based on internal testing using BAT50

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
<b>FPDC20</b>	1 YEAR	022315368354	10" x 16" x 20"	24	17 LBS.

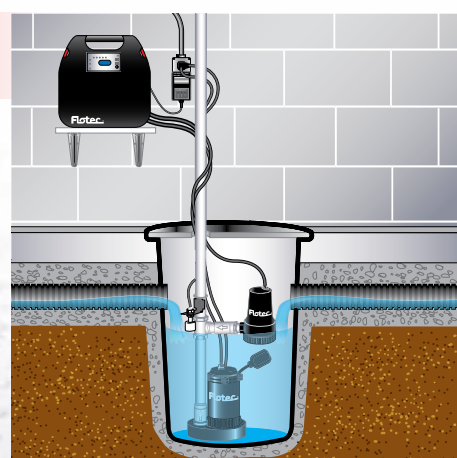

Includes: battery case control unit, 12V pump, reed switch, AC power supply, 1-1/4" NPT to 1-1/2" glue PVC elbow

Compatible with flooded and sealed AGM deep cycle lead acid batteries.

For best performance use Flotec BAT40 or BAT75 sealed AGM batteries.

293 Wright Street, Delavan, WI 53115  
For Questions or Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com) 1-800-365-6832